

# E3204 Pasta Cooker

### Key features

- 25 litre capacity
  - Ideal for bulk cooking pasta
- Integrated water faucet
  - Quick and easy to add water as required
- Starch draw-off drain
  - Keeps water starch free
- Unit needs to be connected to a drain
  - Easy and fast emptying of pan
- Thermostatic temperature control
  - Temperature range from 70 100°C
- Laser-etched control icons
  - Permanent, indelible markings

#### Accessories

- 1/6 size basket
- 1/3 size basket
- Lid
- Factory fitted, adjustable castors
- · Fixed installation kit

#### Similar Models


- E9241 pasta cooker
- G3203 pasta boiler
- G3206 pasta boiler







## E3204 Pasta Cooker

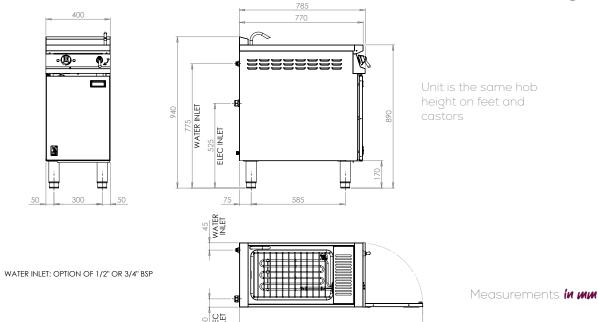

## Specification details

| Electrical rating (kW)             | 8.3                        |               |
|------------------------------------|----------------------------|---------------|
| Electrical supply voltage          | 400V 3N~                   |               |
| Required electrical supply (A)     | 16                         |               |
| Electrical current split (A)       | L1: 12.1 L2: 12.1 L3: 12.1 |               |
| Element rating (kW)                | 8.3                        |               |
| Pan dimensions (w x d x h - mm)    | 310 x 510 x 285            |               |
| Drain connection                   | 3/4"                       |               |
| Weight (kg)                        | 50                         |               |
| Packed weight (kg)                 | 58                         |               |
| Packed dimensions (w x d x h - mm) | 450 x 1000 x 1100          |               |
| GTIN numbers                       | On feet                    | On castors    |
|                                    | 5056466900588              | 5056466900571 |

#### Installation notes

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. A clearance of 150mm should be observed between appliance and any combustible wall. Please consult the appliance installation manual for further details.

