

F900

Eg341 Single Pan Electric Fryer

Key features

- Oil capacity is just 20 litres
 - Efficient to heat and economical to fill up
- Manual controls
- Simple and ease to use
- Eco setting and fat melt mode
- Reduces power consumption during pre-heating
- IPX5 rated
 - Easy and problem-free cleaning
- Supplied with fish grid, lid and oil bucket
 - Everything you need to operate the fryer
- Stainless steel panels with Scotch Brite finish
 - Looks great, ideal for front-of-house kitchens
- Dynamic Link System compatible

- Integrated linking system allows quick and easy installation to create a seamless, continuous cookline

Accessories

- Front hob rail
- Kick strip
- Rear blanking plate
- Side hob extension
- Factory fitted, adjustable castors


Similar Models

- G9341 single pan gas fryer
- E9341F single pan electric fryer with filtration
- E3840 single pan electric fryer





E9341 Single Pan Electric Fryer

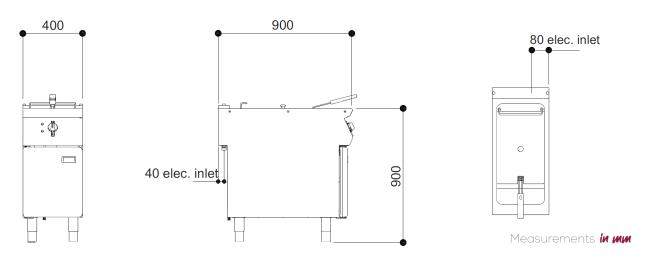

Unit on castors is the same hob height

Specification details

| Electrical rating (kW) | 19 | |
|------------------------------------|--------------------------------|------------|
| Electrical supply voltage | 400V 3N~ 50/60 Hz | |
| Required electrical supply (A) | 32 | |
| Electrical current split (A) | L1: 24.75, L2: 28.88, L3: 27.5 | |
| Element rating (kW) | 19 | |
| Oil capacity (litres) | 20 | |
| Chip Output (kg/hr) | 51 | |
| Weight (kg) | 62 | |
| Packed weight (kg) | 71 | |
| Packed dimensions (w x d x h - mm) | 490 x 1000 x 1015 | |
| GTIN number | On feet | On castors |
| | | |

Short Form specification

Unit to be Falcon F900 Series high performance electric single pan fryer. Pan will be 304 grade stainless steel. Unit to be supplied upon adjustable feet with a working oil capacity of 20 litres.

The pan will be of open well design to allow easy cleaning of the pan. Basket to be positioned at pan rear for oil drain off and storage.

Oil to be drained from pan into oil bucket that is to be self-contained inside the unit base. The oil temperature will be thermostatically controlled via precise controls from 130-190°C. The unit will have safety thermostat fitted as standard to prevent unit from overheating.

The hob will be constructed from 2mm 304 grade stainless steel. Hobs will be laser cut with right-angled edges to allow joining of units with no gaps between hobs. Exterior panels are Scotch Brite finish stainless steel. Control knobs to be marked showing temperature positions and to have a bezel behind each knob to prevent water ingress.

Installation note

Please consult local legislation with regard to installation of cooking equipment.

