



# F900

## *i91105 Induction Range*

### Key features

- 4 x 5kW induction heat zones
  - Instant heat, rapid heat up
- In-built pan detection delivers energy savings
  - No wasted energy as no pan = no energy generated
- Low heat emissions
  - Much cooler working environment
- Precise temperature control
  - Instant heat, rapid heat up
- 6mm toughened glass hob
  - Robust enough for the toughest kitchen environments
  - Simply wipes clean - no scrubbing after service
- IPX5 rated
  - Easy and problem-free cleaning

Wide oven temperature range of 80 - 300°C

- Ideal to prepare a wide variety of food
- 2/1 GN oven with side-mounted runners
  - Large capacity output
- Fully pressed metal to metal door seal
  - Keeps heat where it's needed - in the oven chamber
- Oven has 5 shelf positions and allows 2 shelf cooking
  - Versatile, ideal for a wide range of menu items
- Stainless steel panels with Scotch Brite finish
  - Looks great, ideal for front-of-house kitchens

### Accessories




- Oven shelf
- Front hob rail
- Kick strip
- Rear blanking plate
- Side hob extension
- Factory fitted, adjustable castors



### Similar Models

- i91104 4 x 3.5kW induction range
- i91104C 4 x 3.5kW induction range with fan oven
- i91105C 4 x 5kW induction range with fan oven

- Dynamic Link System compatible
  - Integrated linking system allows quick and easy installation to create a seamless, continuous cookline

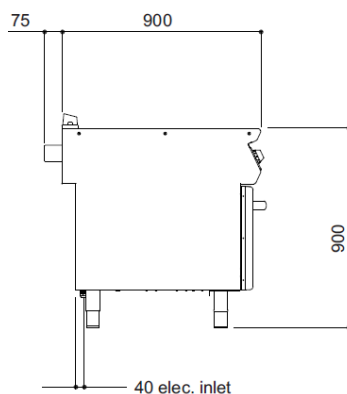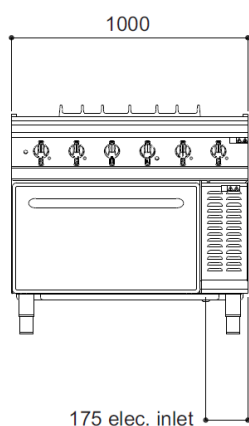

Measurements *in mm*

Unit on castors is the same hob height

## Specification *details*

Electrical rating (kW)	26.2
Electrical supply voltage	400V 3N~
Required electrical supply (A)	63
Electrical current split (A)	L1: 38.6, L2: 38.0, L3: 38.0
Element rating - hob (kW)	4 x 5
Element rating - oven (kW)	6.2
Heat zone diameter (mm)	270
Minimum pan size (mm)	120
Oven dimensions (w x d x h - mm)	565 x 730 x 300
Oven shelf (w x d - mm)	535 x 700
Gastronorm compatibility	2/1
Weight (kg)	140
Packed weight (kg)	160
Packed dimensions (w x d x h - mm)	1200 x 1000 x 1110
GTIN numbers	On feet
	On castors

## Short Form *specification*

Unit to be Falcon F900 Series induction range with a counter top having 4 x 5kW cooking zones. A 2/1 gastronorm compatible oven will be located below.

The hob will be constructed from 6mm toughened ceramic glass and 2mm 304 grade stainless steel. Hobs will be laser cut with right-angled edges to allow joining of units with no gaps between hobs. Exterior panels are Scotch Brite finish stainless steel. Control knobs to be marked showing zone variable control settings and to have a bezel behind each knob to prevent water ingress. The unit will have IPX 5 water resistance certification.

Unit to be supplied upon adjustable feet or upon optional castors.

## Installation note

Please consult local legislation with regard to installation of cooking equipment.

